

SM-272

Point No Point Light Station

Architectural Survey File

This is the architectural survey file for this MIHP record. The survey file is organized reverse-chronological (that is, with the latest material on top). It contains all MIHP inventory forms, National Register nomination forms, determinations of eligibility (DOE) forms, and accompanying documentation such as photographs and maps.

Users should be aware that additional undigitized material about this property may be found in on-site architectural reports, copies of HABS/HAER or other documentation, drawings, and the “vertical files” at the MHT Library in Crownsville. The vertical files may include newspaper clippings, field notes, draft versions of forms and architectural reports, photographs, maps, and drawings. Researchers who need a thorough understanding of this property should plan to visit the MHT Library as part of their research project; look at the MHT web site (mht.maryland.gov) for details about how to make an appointment.

All material is property of the Maryland Historical Trust.

Last Updated: 01-06-2004

POINT NO POINT LIGHT STATION

United States Department of the Interior National Park Service National Register of Historic Places Registration Form

1. Name of Property

historic name: Point No Point Light Station

other names/site number: SM-272

2. Location

street & number: N/A

not for publication: N/A

city or town: near Dameron.

vicinity X

state: Maryland

code: MD

county: St. Mary=s

code: 037

zip code: N/A

3. State/Federal Agency Certification

As the designated authority under the National Historic Preservation Act of 1986, as amended, I hereby certify that this nomination meets the documentation standards for registering properties in the National Register of Historic Places and meets the procedural and professional requirements set forth in 36 CFR Part 60. In my opinion, the property meets the National Register Criteria. I recommend that this property be considered significant locally. (___ See continuation sheet for additional comments.)

[Signature] ACTING
Captain, U. S. Coast Guard,
Chief, Office of Civil Engineering
Signature of certifying official

2/22/02
Date

Department of Transportation, U.S. Coast Guard
State or Federal agency and bureau

In my opinion, the property X meets ___ does not meet the National Register criteria. (___ See continuation sheet for additional comments.)

[Signature]
Signature of commenting or other official

5-7-02
Date

State or Federal agency and bureau

POINT NO POINT LIGHT STATION

SM-272

4. National Park Service Certification

I, hereby certify that this property is:

___ entered in the National Register _____

___ See continuation sheet.

___ determined eligible for the _____

National Register

___ See continuation sheet.

___ determined not eligible for the _____

National Register

___ removed from the National Register _____

___ other (explain): _____

Signature of Keeper

Date of Action

5. Classification

Ownership of Property (Check as many boxes as apply)

- ___ private
- ___ public-local
- ___ public-State
- X public-Federal

Category of Property (Check only one box)

- ___ building(s)
- ___ district
- ___ site
- X structure
- ___ object

Number of Resources within Property

Contributing	Noncontributing	
___	___	buildings
___	___	sites
<u>1</u>	___	structures
___	___	objects
<u>1</u>	<u>0</u>	Total

Number of contributing resources previously listed in the National Register 0

Name of related multiple property listing: Light Stations of the United States

POINT NO POINT LIGHT STATION

6. Function or Use

Historic Functions (Enter categories from instructions)

Cat: transportation

Sub: water-related

Current Functions (Enter categories from instructions)

Cat: transportation

Sub: water-related

7. Description

Architectural Classification (Enter categories from instructions):

No Style

Materials (Enter categories from instructions):

foundation: caisson

roof: metal

walls: brick

other:

Narrative Description (Describe the historic and current condition of the property.)¹

Description Summary

The Point No Point Light Station consists of a wooden caisson supporting a round 30-foot-diameter 51-foot-tall cement-filled cast-iron cylinder, painted red, on which a brick 22-story 35-foot-tall octagonal-shaped brick quarters, painted white, whose mansard roof is surmounted by a 1-story black iron lantern. The combination dwelling and lantern has elements of the Second Empire architectural style.² The station is located in 18 to 22 feet of water, two miles offshore on the western edge of the main ship channel and approximately 5 2/3 nautical miles north-northeast of Point Lookout, and approximately 1 3/4 nautical miles east-southeast of Point No Point, on the northern side of the mouth of the Potomac River, middle Chesapeake Bay, near Dameron, in St. Mary's County, Maryland. Owned and managed by the U.S. Coast Guard in District 5, access to the station is via boat.

¹ The following description and associated photographs were reviewed in August 2002 by a US Coast Guard Aid to Navigation team responsible for the property. A document verifying that the description and associated photographs reflect the current condition of the property is on file with the Office of Civil Engineering, US Coast Guard Headquarters, Washington, DC.

² F. Ross Holland, Jr., "Lighthouses," (draft text for National Historic Landmark Context Theme Study, 1993), p. 87.

General Description³

The lighthouse was described in 1905 as having a cast-iron foundation cylinder 30 feet in diameter and 51 feet in height, expanding near the top, which is 18 feet above the water, into a trumpet shape. Surmounting the foundation cylinder was an octagonal brick dwelling, two stories high, with a mansard roof, supporting a lantern deck with railing and an 8-sided lantern. A gallery surrounded the house, accessible from the water by means of two sets of ladders, and on it were placed steel davits, boat-hoisting apparatus, and the like.⁴

Caisson

The 30-foot-diameter cylinder is constructed of cast-iron plates bolted together in tiers and then stacked on top of each other, all mounted on a wooden frame caisson. The top tier of plates flares outward in the shape of a trumpet forming the gallery with a maximum diameter of 35 feet, 6 inches. The plates are connected at integral flanges to make them watertight, with the flanges turned inward to give it a smooth outer surface. The caisson is painted dark red/brown. A galvanized iron ladder mounted to the east side of the caisson provides access to the gallery level. The Coast Guard removed an adjustable accommodation ladder in 1964. The landing platform and metal stairs on the west side were removed at an unknown date.

Tower, Exterior

The diameter of the octagonal-shaped brick tower is 25 feet, 8 inches, with each side typically 10 feet, 8 inches wide. The gallery deck is a concrete slab over the caisson top approximately 18 feet above the high water level. The original gallery railing has been replaced with seven foot on center 2 1/2-inch-diameter steel pipe vertical posts. The rails are made of 2-inch-deep by 4-inch-wide straight tubular steel. The top rail is approximately 43 inches above the deck, with an intermediate rail 8 inches below it. The bottom rail is approximately 10 inches above the deck. The intermediate and bottom rails support 3/4-inch-diameter balusters every 7 inches on center except the center baluster on each section that is 1-inch diameter. Each section of rail is 7 feet, 6 inches long. The stubs of the original railing are still present at the edge of the flared caisson plates.

The east and west side hatches have been removed. The boat davits on the east side have been removed but along the west side, hatchway remnants of what may be the original davit hoist are still present. A single replacement "fish" davit, used to hoist equipment and supplies, is located on the southeast side of the deck. A cast-iron-plate privy cantilevers over the water from the

³ Much of this narrative is derived from a section of a condition assessment report on Point No Point Light Station prepared by the National Park Service's Historic Preservation Training Center in 1995/1996. This report is on file at the National Maritime Initiative office, National Register, History, and Education Programs, National Park Service, Washington, D.C.

⁴ Lighthouse Board, *Annual Report, 1902*, pp. 124-125, 1903, p. 54, 1904, pp. 52-53, and 1905, pp. 80-81. "Lighthouse Service: New Station at Point-No-Point- Orders Issued," (Washington D.C., April 3, 1905), no page or reference; photograph of lens in Point No Point Light file, USCG facility, Curtis Bay, Maryland; copies of above in Point No Point Light file, National Maritime Initiative Office, National Park Service, Washington, D.C.; and Holland, "Maryland Lighthouses of the Chesapeake Bay: An Illustrated History," chapter 4, p. 23.

southwest side of the first level gallery. The toilet seat has been removed, and plywood has been placed over the bottom to cover the drop hole. The pyramidal-shaped roof has a decorative finial on top. A porthole opening is located on each sidewall, but the portholes themselves are missing. The privy has a ventilated wooden door which is in very poor condition.

The entrance doors to the tower are located on the east and west sides. The original wooden west door has been boarded up, and the original wooden east door, formerly replaced with a hollow steel door, is now replaced with an unlocked hollow wood door. The transom above the east door has been covered with acrylic sheeting fitted with an aluminum vent. The transom over the west door has been boarded up. Over both doors, a metal awning has been placed to keep out wind blown rain. Both are in poor condition. Window fenestration consists of two windows on the first and second level of the north and south side. All four windows on the north side retain their original four-over-four wood sash windows while the south side windows retain only half of their original sashes. The east and west side have a single window on the second level above the first level doors. The sash has been removed from the east side window, and only the lower half remains on the west side. All windows have been covered with acrylic sheeting fitted with an aluminum vent. The head and sill of all windows is made of single pieces of unpainted cut pink granite. There is no fenestration on the other four sides.

There is a two course corbelled brick belt between the first and second level window openings. There is a second corbelled brick belt of three courses at the top of the second level just below the mansard roof. This corbelled belt is painted red. The remaining masonry portion of the tower is painted white, and the mansard roof and lantern are painted black. The vent for the stove and heating has been removed. The Coast Guard removed the 1,000-pound fog bell from the east dormer on November 10, 1964.

Tower, Lower Level

The lower level or cellar is located in the upper portion of the caisson, accessed by a spiraling stairwell located at the head of the foyer. This stairwell is covered with vertical beaded tongue-and-groove paneling painted light yellow. The iron-plate caisson is lined with a 32-inch-thick layer of bricks. Below this level the caisson is solid. There are eight portholes 192 inches in diameter with 14-inch-diameter openings located in arched alcoves in the brick lining. Five of the original brass porthole frames, including glass panes, are still extant, all in the open position. Acrylic sheets have been placed over the port hole openings and caulked in place. The brick walls were painted white at one time, but most of the paint has peeled away.

The first level floor is supported by vaulted masonry which springs from rolled iron beams that span the outer walls in the north-south direction. The lower level has been partitioned with masonry walls. One centrally located wall serves as an intermediate support for the first level floor beams. Off the main room, a coal storage room is evident by remains of coal on the floor, and a coal shoot which runs to the gallery deck above and covered by a 17-inch-diameter iron cover. This room has a wooden door with original hardware intact. Next to it is another room, with an iron door that probably served as the oil room. A third smaller room probably served as storage. The doorframes for these rooms are made of cast iron. In the middle of the lower level, is a centrally located hollow iron column where the counterweights for the fog signal weight-driven striking mechanism was hung. This column also provided support for the upper floor

loads. A small access door is located at the base of the column. Weights are still located in the column well. Below this cellar level, are two 1,100-gallon water cisterns built into the concrete pour. Each was accessed by a 16-inch-diameter hole in the floor. Solid covers no doubt once covered these holes, but now open iron grillwork covers them. A hand-operated water pump to these cisterns connected the kitchen on the first level. Two 550-gallon oil tanks are located in the cellar on 83-inch-square wooden timbers.

Tower, First Level

Immediately in front of the east entrance door, is a small foyer and straight ahead is a spiraling stairwell that leads down to the cellar and up to the upper floors. A central wood column that is offset from the center of the structure supports the wooden spiral staircase. The walls of the stairwell are beaded vertical board paneling. In the middle of the foyer is a hatch that provides access to the cellar storage rooms. The original (or early replacement) is now located in the "sitting room." The hatch opening is covered with plywood sheets. Over the hatch, is a metal hook to accommodate a pulley line for lowering and raising stores. To the left of the entrance foyer, is a 4- by 9-foot storeroom converted to a shower room with vertical beaded board paneling which has been covered by plywood with wood batten strips covering the seams. This room presently serves as a storeroom for the solid wood raised panel doors and windows taken from throughout the lower level of the station. In August 1991, Gredell reported nine round finials from the original balustrades were stored in this location. In 1995, only three were left.

To the right of the entrance foyer, is a "sitting room" occupying approximately one-quarter of the total first floor area. This room and the bathroom have been covered with a concrete overlay that is cracking and in poor condition. Much of the fibrous wall board that was used on the walls and ceiling covering the still intact original beaded board paneling has been removed as of August 2002. Along the exterior walls, 3-inch timbers laid horizontally on 32-inch centers into the masonry were used as nailers for attaching of the original wall paneling. Most of the trim around the door jams and windows include bulls-eyes corner blocks, 1- by 4-inch casing with a molded back band, and wooden sills. The wooden baseboards are capped with a 2-inch ogee. Along the interior wall, are sturdy shelves that held batteries after the station was automated.

The second entrance door is located in a third room measuring 9 by 19 feet. This room may have been used as a living room and a kitchen at one time. The original door is still intact though it is covered with plywood on the outside. The original wood floor is in place. Portions of the original beaded wall paneling have also been covered with plywood though much of it has been removed. A chimney for a heating stove is located on the south side.

Tower, Second Level

The second story is partitioned into two large rooms used for sleeping. Closet areas are located on the east and west sides between the bedrooms. The original beaded board paneling walls and ceiling were for the most part covered with fiber wallboard; however, as of August 2002, much of the wallboard has been removed. Portions of the floors of the bedrooms have been covered with plywood. Floor framing consists of iron joist hangers that connect primary and secondary members. The exterior ends of the floor joists are pocketed in the masonry walls. The door trim

consists of the same bulls-eye molding as used on the first floor. The closet on the west side has been used to store removed and/or replaced doors and windows from throughout this level.

Watch Room

Approximately 18 inches above the third floor level, the walls slope inward toward the lantern giving it its mansard roof shape. The beaded board wall paneling and nearly all the ceiling paneling has been removed, revealing the wood framing which is sheathed with 1-inch decking and topped with a flat seam metal roof. This replacement roof was laid over the gutters so that rain runs directly over the edge of the roof and not into the gutters. (When the lighthouse was automated, the gutter/cistern system was no longer necessary.) Each corner has a round beaded wooden 6-inch-diameter post that supports the lantern level framing. The watch room level, like the two floors below it, is octagonal in shape. There are gable roof dormers with bull nosed windows on the four sides which have fenestration. The fog bell hanging brackets, next to the south window, no longer used when the bell was removed, have been stowed inside. To the right just below the south window, is a fixed pulley wheel from which the weights to drive the fog bell machinery hung. A shaft ran from this level down to the cellar. An access door just inside the entrance foyer has part of the cable still intact. The Coast Guard removed the fog bell on November 10, 1964. Some of the same bulls-eye moldings are still present on the doorframes around the stairs.

Lantern

The lantern consists of an octagonal wood frame supporting a cast-iron frame for housing a fourth-order lens. Access to the lantern from the watch room is via a continuation of the spiral staircase. The parapet wall of the lantern room interior is lined with beaded board paneling. There are three ventilators located in the parapet walls but all the regulators have been removed. The interior of the roof is lined with galvanized sheet metal. An inner smoke hood is still intact. A ventilator ball with a lightning conductor caps the roof. The roof was copper in 1938; now it consists of standing seam sheet metal.

The lantern deck is accessed by a 36-inch-high by 28-inch-wide plywood half door located in the parapet wall. The lantern deck sheeting has been replaced with plywood. The deck and lantern parapet are covered with a flat seam sheet metal. The lantern deck top intermediate and lower railing consists of a 2-inch-wide by 1/2-inch-thick flat bar rail with 1 5/8-inch-diameter posts at each corner. The posts have 3-inch-diameter finial balls on top which match the finials in the shower storage room suggesting the lower gallery rail was made similar to, if not identical to, the upper gallery rail. Each of the eight rail sections is 7 feet long. Pipe flanges bolted to the deck attach the railing. A solar panel is mounted on the railing on the south side. Seven of the eight lantern panes are cracked, some badly.

POINT NO POINT LIGHT STATION

Optic

The original fourth-order lens is no longer in place. The lantern contains a 300mm solar-powered lens. The aid to navigation is visible 11 miles and exhibits a white flashing light every six seconds; an air diaphragm horn fog signal sounds a blast three seconds long, every 30 seconds, when conditions require its use.⁵

8. Statement of Significance

Applicable National Register Criteria (Mark "x" in one or more boxes for the criteria qualifying the property for National Register listing)

- A** Property is associated with events that have made a significant contribution to the broad patterns of our history.
- B** Property is associated with the lives of persons significant in our past.
- C** Property embodies the distinctive characteristics of a type, period, or method of construction or represents the work of a master, or possesses high artistic values, or represents a significant and distinguishable entity whose components lack individual distinction.
- D** Property has yielded, or is likely to yield information important in prehistory or history.

Criteria Considerations (Mark "X" in all the boxes that apply.)

- A** owned by a religious institution or used for religious purposes.
- B** removed from its original location.
- C** a birthplace or a grave.
- D** a cemetery.
- E** a reconstructed building, object, or structure.
- F** a commemorative property.

⁵ USCG Work Order Book from the Lazaretto Lighthouse Depot. archives of the Chesapeake Bay Maritime Museum, St. Michaels, Maryland (catalog number CBMM 68-110-27). E. M. Handley, "Point No Point Light, National Register of Historic Places Inventory - Nomination Form," undated copy; "Description of Point No Point Light Station, February 8, 1838;" and Joseph T. Sedlock, "Coast Guard Struggling to Maintain Chesapeake Lighthouses," *The Enterprise*, volume 90, number 73 (September 14, 1988), p. 1; copies in National Maritime Initiative Office, National Park Service, Washington, D.C.; and Point No Point Light file, USCG facility, Curtis Bay, Baltimore, Maryland.

POINT NO POINT LIGHT STATION

 G less than 50 years of age or achieved significance within the past 50 years.

Areas of Significance (Enter categories from instructions):

Maritime History
Transportation
Architecture

Period of Significance: 1905-1952

Significant Dates: 1905

Significant Person (Complete if Criterion B is marked above): N/A

Cultural Affiliation: N/A

Known Design Source: none

Architect/Builder: Toomey Brothers, New York.

Narrative Statement of Significance (Explain the significance of the property.)

The Point No Point Light Station is significant for its association with federal governmental efforts to provide an integrated system of navigational aids and to provide for safe maritime transportation in the Chesapeake Bay, a major transportation corridor for commercial traffic from the early nineteenth through twentieth centuries. This pneumatic caisson lighthouse embodies a distinctive design and method of construction that typified lighthouse construction on the Chesapeake Bay during the late half of the nineteenth and early twentieth century. Of the eleven pneumatic caisson lighthouses built in the United States, seven were built in the Chesapeake Bay; three were built in the Virginia portion of Chesapeake Bay (Wolf Trap Lighthouse, 1894, Smith Point Lighthouse, 1897, and Thimble Shoal Lighthouse, 1914) and four in the Maryland portion of Chesapeake Bay (Solomons Lump Lighthouse, 1895, Hooper Island Lighthouse, 1902, Point No Point Lighthouse, 1905, and Baltimore Lighthouse, 1908).⁷ Point No Point Lighthouse is one of four lighthouses built on Chesapeake Bay in the twentieth century.

⁷ *U.S. Lighthouse Service 1915* (Washington D.C., Government Printing Office 1916), p. 28. Lawrence H. Bradner, *The Plum Beach Light: The Birth, Life, and Death of a Lighthouse* (1988), p. 169; Clifford p. 165 and 173 indicates Alpena Lighthouse and Fourteen Foot Shoal Lighthouse are also pneumatic, but this is apparently incorrect. Bradner gives a date of 1902 for Point No Point Lighthouse while de Gast p. 63 and Clifford p. 130 give a date of 1905.

History

A Maryland Act in April 6, 1874, authorized acquisition of approximately five acres of submarine land for the establishment of a lighthouse or other such aid to navigation. The Lighthouse Board stated in 1891 that:

There is a stretch of about 30 miles between the Cove Point and Smith Point lights which should be better lighted. For a part of the distance navigators are without a guide, where a deviation from their sailing course might carry vessels of heavy draught on to dangerous shoals. There are many of this class of craft now trading to Baltimore, and their number is increasing. A light-house on the shoal of Point No Point would be useful warning...⁸

The Board recommended a screw pile lighthouse with an estimated cost of \$35,000. Congress refused to allocate the necessary funds, and the request was repeated in 1892 and 1893. By 1894, the Lighthouse Board considered screw pile lighthouses too vulnerable to ice damage on the Chesapeake Bay and now recommended a more expensive caisson-type lighthouse, estimated to cost \$70,000. In 1899, the Lighthouse Board stated "petitions for a light at this locality have lately become quite urgent." Congress appropriated \$65,000 on March 3, 1901, and a test boring was made at the site and plans begun. The plans were completed and the project bid in 1902. The lowest bid for the metal work was \$9,475, while Toomey Brothers of Connecticut were awarded a contract to erect the caisson with a low bid of \$38,880. They commenced work in August of 1902. This lighthouse was built using the pneumatic caisson system.⁹

A 32-foot-square wood caisson was built up from nine courses of timbers and launched on November 15, 1902. The balance of the caisson's decking was attached completing a 13-foot-tall airtight caisson onto which was fastened two courses of plating of the cast-iron cylinder. Work stopped for the winter on January 24, 1903, and resumed on March 23, 1904. A third course of cast-iron plating was added and 12-inches of concrete poured into the cylinder over the caisson deck for ballast. A schooner was loaded with 350 tons of dry mixed concrete and a load of crushed stone, and a second vessel was loaded with riprap stone and sailed to the site. The caisson was towed by the tug *Sarah* to the site from Solomons, Maryland, on April 3, 1903. A temporary pier with living quarters, which had been built by the contractors the previous year to assist in the construction of the station, gave way because of the beating of the caisson/cylinder assembly against the pier during a northwest gale. The assembly filled with water, overturned and began drifting down the Bay. Before the assembly could be retrieved, about 40 miles south off the mouth of the Rappahannock River on April 5, the second and third tiers of cast iron plates had broken off. The caisson was towed back to Solomons, Maryland, where new second and third cast-iron-plate courses were replaced and the pier rebuilt, all at the cost of the contractor despite their pleas to the Lighthouse Board.¹⁰

⁸ Lighthouse Board, *Annual Report, 1891*, p. 171.

⁹ Lighthouse Board, *Annual Report, 1891*, p. 89; *1892*, p. 93, *1893*, p. 93; *1894*, pp. 95-96; *1899*, p. 102; *1900*, p. 96; *1901*, pp. 32 and 107; and *1902*, p. 125.

¹⁰ Lighthouse Board, *Annual Report, 1902*, pp. 124-125; and *1903*, p. 54; and Light-House Board to Col. W.A. Jones, May 29 and June 29, 1903, RG26, Entry 23, Box 101, Letter Send to District Engineers and Inspectors,

POINT NO POINT LIGHT STATION

The assembly was re-floated into position and re-sunk on October 21, 1903, and approximately 225 tons of riprap was placed around the assemblage cylinder to prevent current scouring. The rebuilt work platform and pier was destroyed again, this time by ice during February 1904. Construction equipment including the compressor, boiler, tools, and temporary workman's dwelling were also lost, but little damage was incurred to the caisson assemblage. A third pier was begun in March. By this time, the cylinder had been filled with concrete to within three inches above the third course and five tiers of plates were in place. Removal of sand and debris from within the caisson began on June 2, and by the end of the month, it had been sunk 13 feet into the bottom. Two more tiers of plates were added and the cylinder completely filled with concrete except for the space required for a cellar and two cisterns. After the quarters were completed, and the fourth-order lens installed, the Point No Point Lighthouse was commissioned on April 24, 1905. The fourth-order lens was a six-panel light with two bull's-eyes panels and two opaque panels between them. The light issued an alternating flashing red and white light. The fog bell was struck a double blow every 15 seconds during foggy weather by weight driven striking machinery.¹¹ The first keeper was Anders Simonsen, formally keeper at the Love Point Lighthouse.

In 1913, the illuminant was changed from oil wick to incandescent oil-vapor. On August 23, 1933, a powerful hurricane broke out many of the porthole panes, flooding the cellar, and contaminating the station's freshwater supply. The station's sailboat was torn from its davits and lost.¹² The power source was changed from a 10-volt-battery pack to a kerosene generator on October 26, 1938. The station was described in 1938 as having a light characteristic of one-second white flash and 19-second eclipse as well as a red sector. The lens, a 360 degree revolving fourth-order Fresnel, was rotated by a weight-driven clock mechanism. The 30-pound weight had to be rewound every 14 hours. It was still using the incandescent oil-vapor type lamp installed in 1913. Oil was stored in two 550-gallon tanks in the cellar. The fog signal was a "Gamewell apparatus # 3" which was a weight-driven clock mechanism which provided a double strike every 15 seconds. The weights for this mechanism had to be rewound every hour and ten minutes. The fog signal bell was described as a 37-inch-diameter and 30-inch-high bell embossed with "Gamewell Fire Alarm Co." Water was collected from the roof and stored in two 1100-gallon cisterns in the cellar. The station was outfitted with a 22-foot "motor boat" powered by a six horse power Lanthrop engine and a 16-foot "row boat" hung on davits.

The lighthouse was automated on April 24, 1962, exactly 57 years after it's commissioning. William Wrightson was the last keeper in 1962.¹³ At this time, there were only three other manned lighthouses in Maryland: Craighill Channel Lower Front Range, Sandy Point, and

U.S. National Archives, Washington, D.C.

¹¹ de Gast, p. 63.

¹² Lighthouse Board, *Annual Report, 1913*, p. 45; and J. W. Wilson letter to Superintendent of Lighthouses, Point No Point Light, August 24, 1933, File 1431E, Correspondence of the Bureau of Lighthouses, 1911-1939, National Archives, Washington, D.C.

¹³ Philip E. Evans, "One of Maryland's Last Manned Lighthouses," *Sunday Sun Magazine* (March 18, 1962), p. 20.

Thomas Point Shoals. At the time of decommissioning, the lighthouse had a 16-foot and a 23-foot boat.

The lighthouse was painted in the spring of 1978. In 1988, about 32-cubic-yards of debris was removed from the lighthouse before a thorough renovation could be completed. The structure was sealed so tight that resultant water moisture rotted much of the wood and rusted much of the metal. A leak had developed in the roof adding further moisture problems. During the summer of 1992, the Coast Guard Baltimore Group Curtis Bay washed the guano from the roof, wire-brushed and primed the bare metal, and applied two coats of black vinyl enamel.

9. Major Bibliographical References

Bradner, Lawrence H. *The Plum Beach Light: The Birth, Life, and Death of a Lighthouse*, 1988.

Clifford, Candace. *1994 Inventory of Historic Light Stations*. Department of Interior, National Park Service, History Division, Washington, D.C., 1994.

de Gast, Robert. *The Lighthouses of the Chesapeake*. The Johns Hopkins University Press, Baltimore and London, 1973.

Evans, Philip. E. "One of Maryland's Last Manned Lighthouses," *Sunday Sun Magazine*, March 18, 1962.

Holland, F. Ross, Jr. *Lighthouses, @ A part of the Maritime Heritage of the United States National Historic Landmark Theme Context Study for Lighthouses*, National Maritime Initiative, National Park Service, Washington, D.C. (1993).

_____ *Maryland Lighthouses of the Chesapeake Bay: An Illustrated History*. Maryland Historical Trust, Crownsville, Maryland, in press.

U.S. Lighthouse Board. *Annual Reports, 1891-1913*. Department of Commerce and Labor, Washington, D.C., 1891-1913.

Previous documentation on file (NPS)

___ preliminary determination of individual listing (36 CFR 67) has been requested.

___ previously listed in the National Register

previously determined eligible by the National Register

___ designated a National Historic Landmark

___ recorded by Historic American Buildings Survey # _____

___ recorded by Historic American Engineering Record # _____

POINT NO POINT LIGHT STATION

Primary Location of Additional Data

- State Historic Preservation Office
 Other State agency
 Federal agency
 Local government
 University
 Other

Name of repository: National Archives; Library of Congress; National Maritime Initiative,
 National Park Service; U.S. Coast Guard Headquarter, Historian's Office, Washington, D.C.

 10. Geographical Data

Acreage: Less than one acre

USGS Quadrangle: Point No Point, MD

UTM References:	Zone	Easting	Northing
	18	386865	4220585

Boundary Description:

The boundary is conterminous with the foundation of the light station.

Boundary Justification:

The boundary completely encompasses the light station.

 11. Form Prepared By

name/title: Ralph E. Eshelman, Maritime Historian

(Originally prepared for the Maryland Historical Trust as part of a multiple property nomination for Maryland Lighthouses; reformatted in May 1998 by Candace Clifford, NCSHPO consultant to the National Maritime Initiative, as part of a multiple property documentation form for U.S. Coast Guard-owned light stations); edited and revised by Jennifer Perunko, NCSHPO Consultant, National Maritime Initiative, National Park Service, August 2002

organization: Eshelman & Associates

date: March 10, 1996

street & number: 12178 Preston Dr.

POINT NO POINT LIGHT STATION

city or town: Lusby state: MD zip code: 20657

telephone: 410-326-4877

=====
Property Owner
=====


name: U.S. Coast Guard, Fifth District


street & number: 431 Crawford Street

telephone: (757) 398-6351

city or town: Portsmouth state: VA zip code: 23705-5004



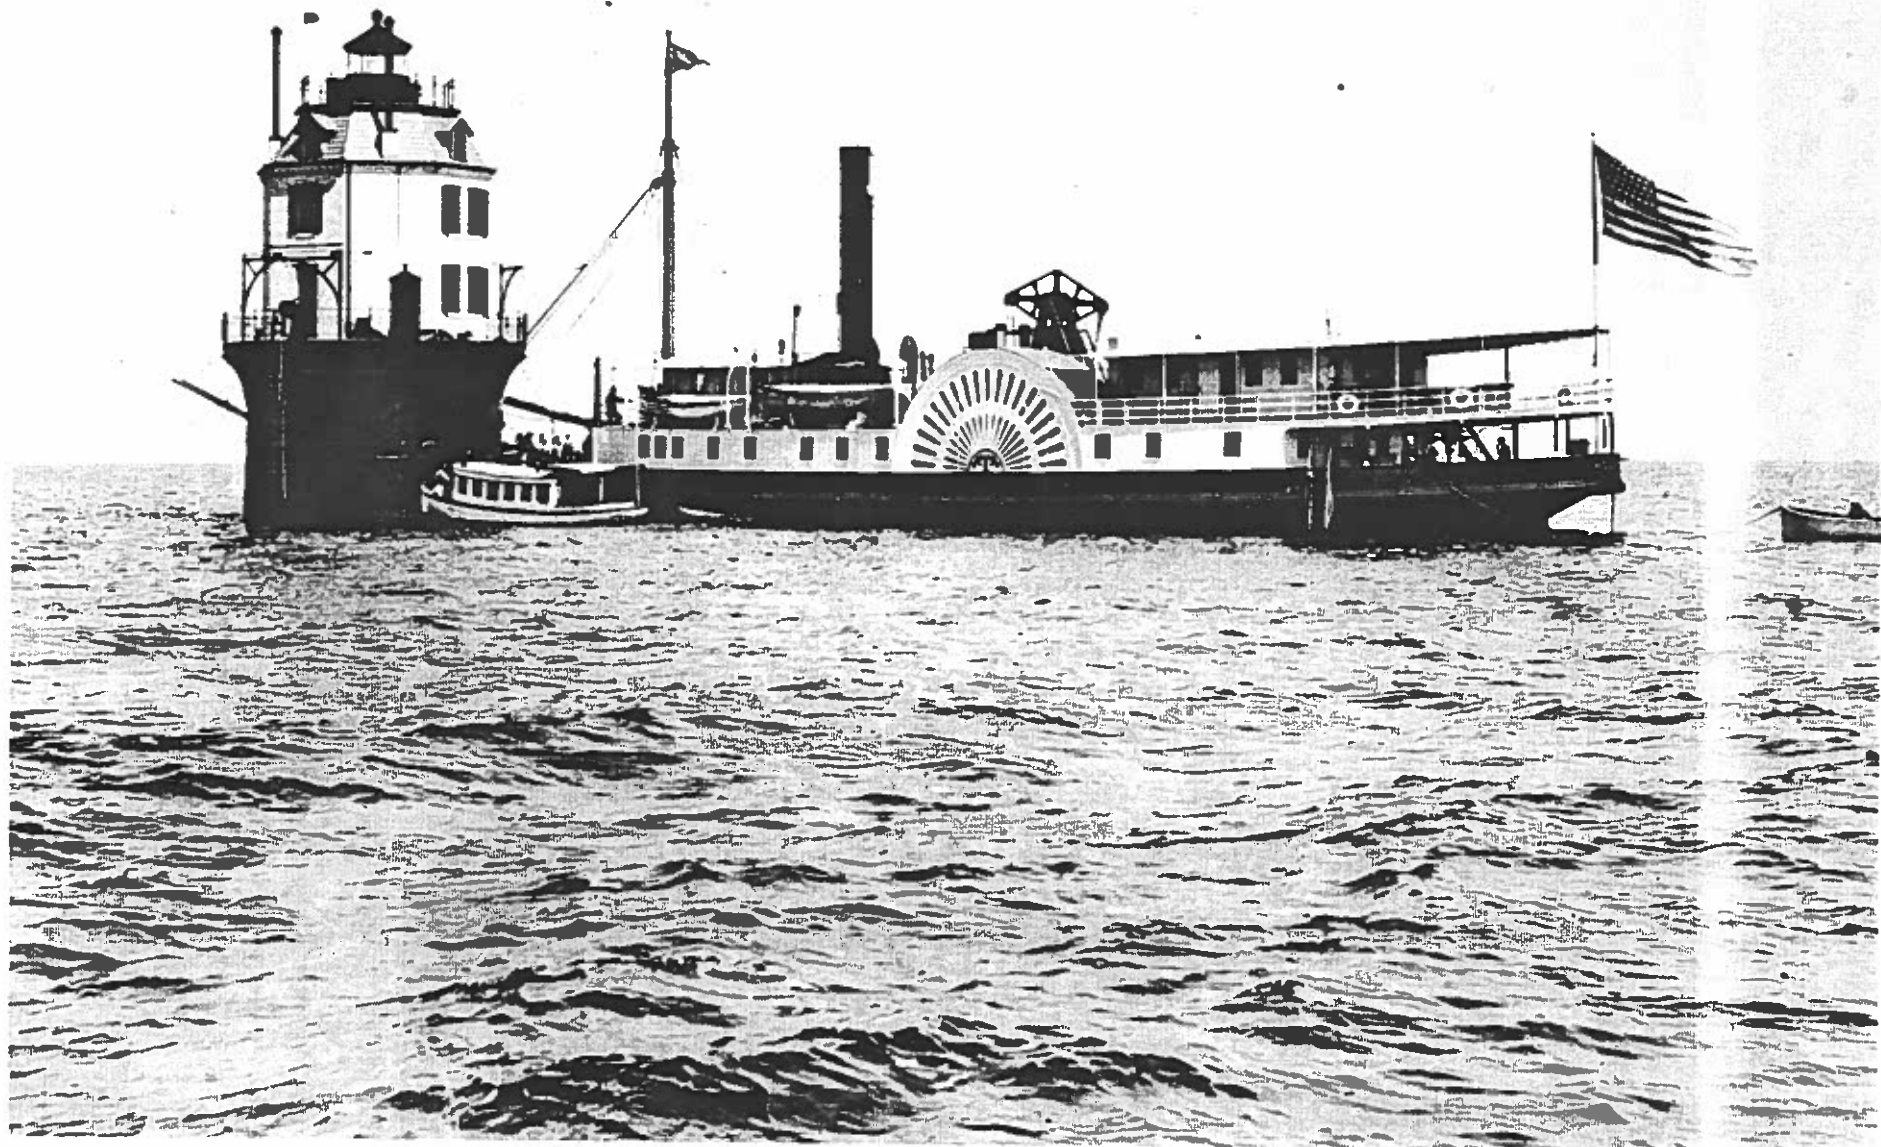

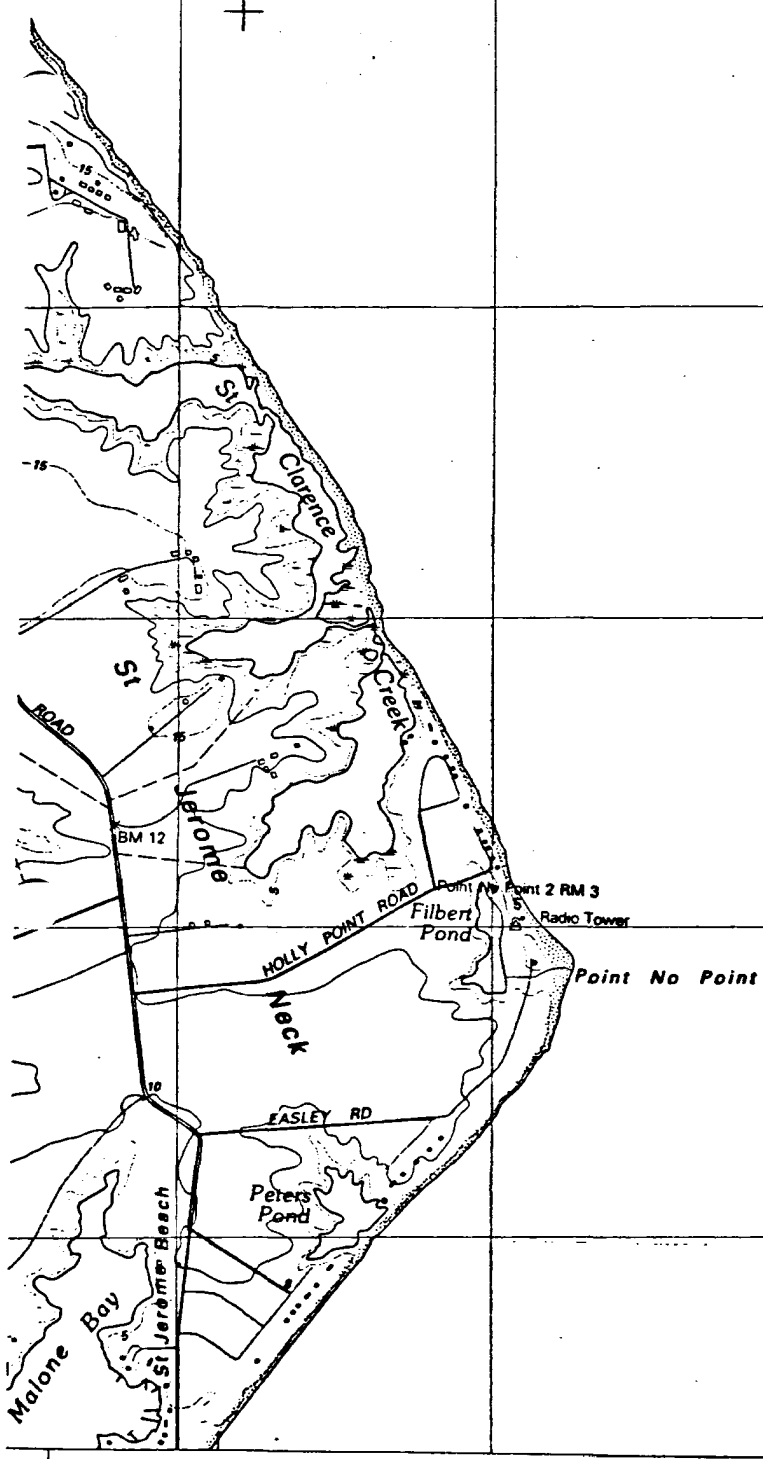


Point No Point Light Station
 St. Mary's County, MD
 UTM Coordinates:
 18 386865 4220585

Point No Point Light Station
 St. Mary's County, MD
 UTM Coordinates:
 18 386865 4220585

Point No Point
 Lighthouse

20' 364 (POINT LOOKOUT) 5790 W SE 366 17' 30"

SCALE 1:24 000

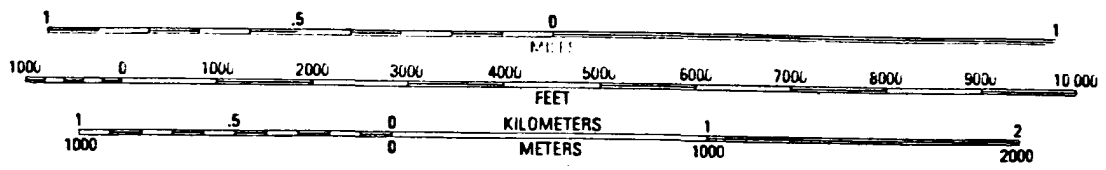

CONTOUR INTERVAL 10 FEET
 SUPPLEMENTARY CONTOUR INTERVAL 5 FEET
 NATIONAL GEODETIC VERTICAL DATUM OF 1929

MAGNETIC NORTH
 ENTER OF SHEET

MA
 QUI

**MARYLAND HISTORICAL TRUST
NR-ELIGIBILITY REVIEW FORM**

NR Eligible: yes X
no _____

Property Name: Point No Point Light Inventory Number: SM-272

Address: Chesapeake Bay City: Dameron Zip Code: 20628

County: Saint Marys USGS Topographic Map: Point No Point

Owner: U.S. Coast Guard

Tax Parcel Number: _____ Tax Map Number: _____ Tax Account ID Number: _____

Project: _____ Agency: _____

Site visit by MHT staff: X no _____ yes _____ Name: _____ Date: _____

Eligibility recommended X Eligibility **not** recommended _____

Criteria: X A B C D Considerations: A B C D E F G None

Is the property located within a historic district? X no _____ yes _____ Name of District: _____

Is district listed? _____ no _____ yes _____ Determined eligible? _____ no _____ yes _____ District Inventory Number: _____

Documentation on the property/district is presented in:
Maryland Inventory of Historic Properties

Description of Property and Eligibility Determination: *(Use continuation sheet if necessary and attach map and photo)*

This lighthouse, constructed in 1903, has been in use since April 24, 1905 as an aid to navigation. It is located offshore 5 2/3 nautical miles NNE from Point Lookout Light or approximately 1 3/4 miles ESE of Point No Point, a point of land near the town of Dameron, Maryland. The octagonal brick tower with 11' sides sets atop a brown 30' diameter cylinder caisson in 22' of water. Originally built under the auspices of the Lighthouse Board, the lighthouse was transferred to the jurisdiction of the Coast Guard when the Lighthouse Service merged with the Lifesaving Service on July 1, 1939. Personnel were withdrawn and the lighthouse automated on April 25, 1962. The lighthouse is one of four lighthouses in the Chesapeake Bay built in the 20th century and one of the three designed with a mansard roof and arched dormer windows. The aid, visible for a nominal 11 miles, serves as a guide to mariners in the area, flashing white every 6 seconds and sounding a 3 second blast every 30 seconds during the fog months of 15 September through 1 June. The MIHP form for this property was written c. 1979. A handwritten note on the capsule summary for the property reads: "This property has been determined eligible for the National Register of Historic Places, the Department of the Interior, by the Secretary of the Interior." The handwriting is that of Pamela James, MHT NR Coordinator in the 1970s. A rather sparse NR Nomination form was written in 1973 by T.N. Miller, Property Officer, Fifth Coast Guard District. It was nominated by Orlando Ridout IV on October 18, 1973. A more complete form was completed c. 1979 by D.M. Hanley, also of the Coast Guard.

Prepared by: CW04 D.M. Hanley, Coast Guard Date Prepared: _____

MARYLAND HISTORICAL TRUST REVIEW	
Eligibility recommended <u>X</u>	Eligibility not recommended _____
Criteria <u>X</u> A <u> </u> B <u> </u> C <u> </u> D	Considerations <u> </u> A <u> </u> B <u> </u> C <u> </u> D <u> </u> E <u> </u> F <u> </u> G <u> </u> None
MHT Comments:	
<u>The MIHP form lists the structure as significant in the area of Navigation. A handwritten note on the capsule summary declares it to have been determined eligible for the NR by the Secretary of the Interior.</u>	
Reviewer, Office of Preservation Services	Date
<u>Orlando Ridout IV</u>	<u>October 18, 1973</u>
Reviewer, NR Program	Date

[Handwritten signature]

S M -272
POINT NO POINT LIGHT
Dameron

1905

Completed in 1905, Point No Point Light is one of four lighthouses on the Chesapeake constructed after 1900. It stands two miles from the St. Mary's County shore.

The lighthouse is an octagonal brick building fifty-two feet high with eleven foot sides. It sits on a cast-iron caisson thirty feet in diameter. Painted white, the substructure is 2 1/2 stories with an octagonal mansard roof surmounted by an octagonal cupola containing the light. There is a pair of windows on each floor and a dormer in the roof in every other wall of the structure. It has a brick belt course and cornice. The lighthouse is presently operated as an unmanned navigational aid by the U.S. Coast Guard.

This property has been determined eligible for the National Register of Historic Places, U.S. Department of the Interior, by the Secretary of the Interior.

↖
Handwriting is
Pamela James
Per P. Kurtze, 2001

UNITED STATES DEPARTMENT OF THE INTERIOR
 NATIONAL PARK SERVICE
NATIONAL REGISTER OF HISTORIC PLACES
INVENTORY -- NOMINATION FORM
 FOR FEDERAL PROPERTIES

SM-272

FOR NPS USE ONLY

RECEIVED

DATE ENTERED

SEE INSTRUCTIONS IN *HOW TO COMPLETE NATIONAL REGISTER FORMS*
 TYPE ALL ENTRIES -- COMPLETE APPLICABLE SECTIONS

1 NAME

HISTORIC
 Point No Point Light
 AND/OR COMMON
 Point No Point Light

2 LOCATION

STREET & NUMBER

CITY, TOWN Dameron	<input checked="" type="checkbox"/> VICINITY OF	CONGRESSIONAL DISTRICT First	NOT FOR PUBLICATION
STATE Maryland	CODE 24	COUNTY St. Marys	CODE 037

3 CLASSIFICATION

CATEGORY	OWNERSHIP	STATUS	PRESENT USE
<input type="checkbox"/> DISTRICT	<input checked="" type="checkbox"/> PUBLIC	<input type="checkbox"/> OCCUPIED	<input type="checkbox"/> AGRICULTURE <input type="checkbox"/> MUSEUM
<input type="checkbox"/> BUILDING(S)	<input type="checkbox"/> PRIVATE	<input checked="" type="checkbox"/> UNOCCUPIED	<input type="checkbox"/> COMMERCIAL <input type="checkbox"/> PARK
<input checked="" type="checkbox"/> STRUCTURE	<input type="checkbox"/> BOTH	<input type="checkbox"/> WORK IN PROGRESS	<input type="checkbox"/> EDUCATIONAL <input type="checkbox"/> PRIVATE RESIDENCE
<input type="checkbox"/> SITE	PUBLIC ACQUISITION	ACCESSIBLE	<input type="checkbox"/> ENTERTAINMENT <input type="checkbox"/> RELIGIOUS
<input type="checkbox"/> OBJECT	<input type="checkbox"/> IN PROCESS	<input type="checkbox"/> YES RESTRICTED	<input type="checkbox"/> GOVERNMENT <input type="checkbox"/> SCIENTIFIC
	<input type="checkbox"/> BEING CONSIDERED	<input type="checkbox"/> YES UNRESTRICTED	<input type="checkbox"/> INDUSTRIAL <input type="checkbox"/> TRANSPORTATION
		<input checked="" type="checkbox"/> NO	<input type="checkbox"/> MILITARY <input checked="" type="checkbox"/> OTHER Navigation

4 AGENCY

REGIONAL HEADQUARTERS *(If applicable)*
 Commander, Fifth Coast Guard District

STREET & NUMBER
 431 Crawford Street

CITY, TOWN
 Portsmouth

STATE
 Virginia 23705

5 LOCATION OF LEGAL DESCRIPTION

COURTHOUSE,
 REGISTRY OF DEEDS, ETC. Same as #4

STREET & NUMBER
 Logistics and Property Branch

CITY, TOWN

STATE

6 REPRESENTATION IN EXISTING SURVEYS

TITLE
 None

DATE

— FEDERAL — STATE — COUNTY — LOCAL

DEPOSITORY FOR
 SURVEY RECORDS

CITY, TOWN

STATE

DESCRIPTION

CONDITION		CHECK ONE	CHECK ONE
<input type="checkbox"/> EXCELLENT	<input checked="" type="checkbox"/> DETERIORATED	<input checked="" type="checkbox"/> UNALTERED	<input checked="" type="checkbox"/> ORIGINAL SITE
<input type="checkbox"/> GOOD	<input type="checkbox"/> RUINS	<input type="checkbox"/> ALTERED	<input type="checkbox"/> MOVED DATE _____
<input type="checkbox"/> FAIR	<input type="checkbox"/> UNEXPOSED		

DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

Point No Point Light is located offshore 5 2/3 nautical miles NNE from Point Lookout Light or approximately 1 3/4 miles ESE of Point No Point, a point of land near the town of Dameron, Maryland. The octagonal brick tower with 11' sides sets atop a brown 30 foot diameter cylinder caisson in 22 feet of water.

The 52 foot high 2 1/2 story structure still stands on its original site, sporting a new coat of paint applied in April and May of 1978. The previous color scheme was followed, namely, black, black roof, white sides and brown caisson.

Boarding access to the main deck platform is afforded by a vertical iron rung-type ladder on the east side. The adjustable accommodation ladder was removed by the Coast Guard in 1964 because it presented a hazard to personnel in servicing the light. The landing platform and metal stairs once located on the west side have since been removed.

The iron life rail around the main platform deck is rusty and in some places is broken. The boat davits once located on the east and west side have been removed. One lone "fish" davit used to hoist equipment and supplies aboard still stands in the southeast corner. Structure of the privy extends out over the water on the southwest quarter but the seat and ornamental roof have passed to the ways.

The entrance on the west side is bricked closed possibly as a step to avert unauthorized entry after the light was automated in April 1962. The four over four windows on the first and second story, like the dormer windows have been covered over with plywood. The exhaust flue for the cook stove and heating has been removed. The 1000 pound fog bell was removed from the east eaves by a Coast Guard Buoy Tender on the 10th of November 1964.

Entering the interior from the door on the east side leads into a small foyer. Straight ahead and down leads to the concrete basement where the fuel tanks and water cisterns are housed. To the left of the foyer is a space 4' x 9' which appears to have been a storage room. To the right of the foyer is a 9' 19' room presumed to have been watchstander's quarters. The second story interior contained the kitchen and living room. Ascending more wooden steps leads up and into the light tower on the exterior 1/2 story where the air diaphragm fog horn is positioned. The original Fresnel lens has been removed and replaced with a 375MM lantern. The light shines out through 3' x 3' square clear panes.

SIGNIFICANCE

PERIOD	AREAS OF SIGNIFICANCE -- CHECK AND JUSTIFY BELOW			
<input type="checkbox"/> PREHISTORIC	<input type="checkbox"/> ARCHEOLOGY PREHISTORIC	<input type="checkbox"/> COMMUNITY PLANNING	<input type="checkbox"/> LANDSCAPE ARCHITECTURE	<input type="checkbox"/> RELIGION
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> ARCHEOLOGY-HISTORIC	<input type="checkbox"/> CONSERVATION	<input type="checkbox"/> LAW	<input type="checkbox"/> SCIENCE
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> ECONOMICS	<input type="checkbox"/> LITERATURE	<input type="checkbox"/> SCULPTURE
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> ARCHITECTURE	<input type="checkbox"/> EDUCATION	<input type="checkbox"/> MILITARY	<input type="checkbox"/> SOCIAL HUMANITARIAN
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> ART	<input type="checkbox"/> ENGINEERING	<input type="checkbox"/> MUSIC	<input type="checkbox"/> THEATER
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> COMMERCE	<input type="checkbox"/> EXPLORATION SETTLEMENT	<input type="checkbox"/> PHILOSOPHY	<input type="checkbox"/> TRANSPORTATION
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> COMMUNICATIONS	<input type="checkbox"/> INDUSTRY	<input type="checkbox"/> POLITICS GOVERNMENT	<input checked="" type="checkbox"/> OTHER (SPECIFY) Navigation
		<input type="checkbox"/> INVENTION		

SPECIFIC DATES 24 April 1905 BUILDER/ARCHITECT _____

STATEMENT OF SIGNIFICANCE

The Maryland Act of April 6, 1874 authorized acquisition of approximately five acres of land for the establishment of lighthouses or such other aids of navigation as may be required.

In 1891, the Lighthouse Board first requested that a light be erected on the western side of the Chesapeake in that 30 mile stretch between Cove Point and Smith Point Lights. The estimated cost was \$35,000.00. The request was repeated in the next two years to no avail, and by 1894 the price had gone up. "The Board is now of opinion that only caisson structures should be used where such damage to screwpile structures by ice exists". Estimated cost not to exceed \$70,000.00. Finally, in 1901, \$65,000.00 was appropriated, bids sent out, and contracts awarded. In August 1902, work was started on the fabrication of the caisson which was towed to the site the next April. A temporary pier build by the contractors during the previous summer, gave way and the caisson turned over. After some of the cast-iron plates broke off, the caisson drifted down the Bay before a northwest gale. The contractor's tug followed and picked it up the next day off the mouth of the Rappahannock River, 40 miles to the south. It was towed back to Solomons Island for repairs. On October 22, 1903 it was floated into position and sunk in place. A year and a half later, on April 24, 1905 the light was first shown from the finished tower by the first keeper Anders Simonsen.

On October 26, 1938 the power source was changed from 10V battery pack to kerosene engine generating units. On July 1, 1939 when the Lighthouse Service merged with the Lifesaving Service, the lighthouse was transferred to the jurisdiction of the Coast Guard.

Personnel were withdrawn and the light was automated on April 25, 1962.

The lighthouse is one of four lighthouses in the Chesapeake Bay built in the Twentieth Century and one of the three designed with mansard roof and arched dormer windows. ✓

The aid, visible for a nominal 11 miles serves as a guide to mariners in the area, flashing white every 6 seconds and sounds a 3 second blast every 30 seconds during the fog months of 15 September through 1 June.

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

FOR NPS USE ONLY
RECEIVED
DATE ENTERED

SM-272

NATIONAL REGISTER OF HISTORIC PLACES
PROPERTY MAP FORM

SEE INSTRUCTIONS IN HOW TO COMPLETE NATIONAL REGISTER FORMS
TYPE ALL ENTRIES -- ENCLOSE WITH MAP

1 NAME

HISTORIC

Point No Point

AND/OR COMMON

Point No Point

1 LOCATION

CITY, TOWN

Dameron

XX VICINITY OF

COUNTY

St. Marys

STATE

Maryland

1 MAP REFERENCE

SOURCE U.S. Dept. Of The Interior, Geological Survey


SCALE 1:24000 (7.5 Minute Series) DATE 1943

1 REQUIREMENTS

TO BE INCLUDED ON ALL MAPS

- 1. PROPERTY BOUNDARIES
- 2. NORTH ARROW
- UTM REFERENCES

INT: 3464-75



POINT NO POINT LIGHT, DAMERON,
ST. MARYS COUNTY, MARYLAND
UTM REFERENCE: 18/386865/4220585

4221000m N.

1730

390000m E. 76 15'

1 MILE

ROAD CLASSIFICATION

- Medium duty — — — — —
- Light duty — — — — —
- Unimproved dirt — — — — —
- State Route — — — — —

POINT NO POINT, MD

NE 4 POINT LOOK OUT 15 1/2 ACRES
13807 E. W. 76 15'

18386865
4220585

FOR NPS USE ONLY
RECEIVED
DATE ENTERED

SM-272

NATIONAL REGISTER OF HISTORIC PLACES PROPERTY MAP FORM

SEE INSTRUCTIONS IN *HOW TO COMPLETE NATIONAL REGISTER FORMS*
TYPE ALL ENTRIES -- ENCLOSE WITH MAP

NAME

HISTORIC
Point No Point

AND/OR COMMON
Point No Point

LOCATION

CITY, TOWN
Dameron

XX VICINITY OF

COUNTY
St. Marys

STATE
Maryland

MAP REFERENCE

SOURCE U.S. Dept. Of The Interior, Geological Survey

SCALE 1:24,000 (7.5 Minute Series) DATE 1943

REQUIREMENTS

TO BE INCLUDED ON ALL MAPS

1. PROPERTY BOUNDARIES
 2. NORTH ARROW
- UTM REFERENCES

INT: 3464-75

4221000m N.

POINT NO POINT LIGHT, DAMERON,
ST. MARYS COUNTY, MARYLAND
UTM REFERENCE: 18/386865/4220585

17'30"

38°07'30"
390000m E. 76°15'


1 MILE

ROAD CLASSIFICATION

- Medium duty — — — Light duty
- Unimproved dirt
- State Route

(BLOODSWORTH ISLAND)
1:62,500

POINT NO POINT MAP

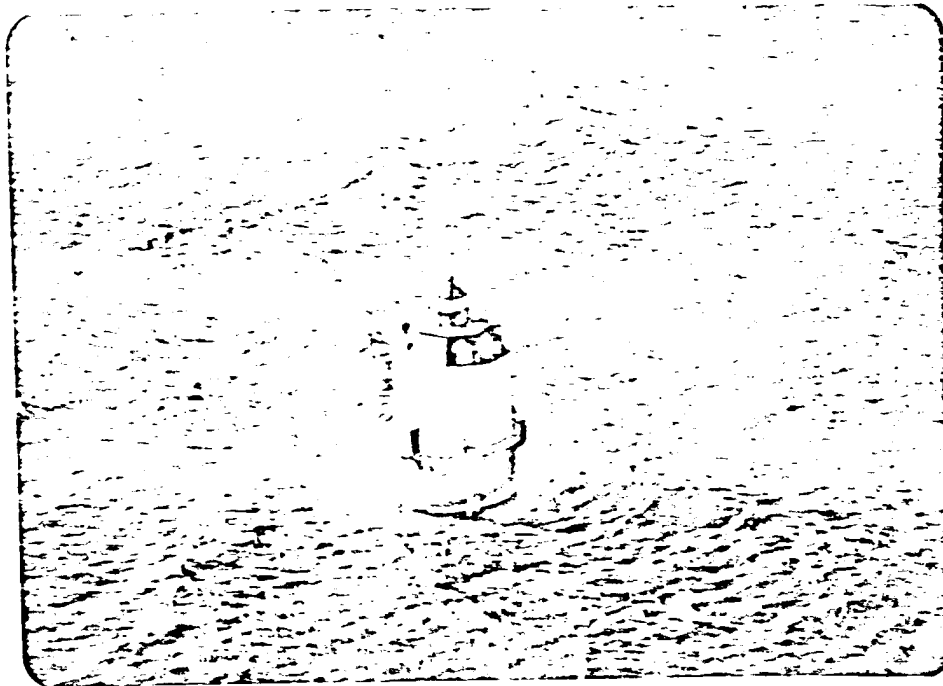

Form No 10-301a
(Rev. 10-77)

UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICE

**NATIONAL REGISTER OF HISTORIC PLACES
PROPERTY PHOTOGRAPH FORM**

FOR NPS USE ONLY
RECEIVED
DATE ENTERED

SEE INSTRUCTIONS IN *HOW TO COMPLETE NATIONAL REGISTER FORMS*
TYPE ALL ENTRIES ENCLOSE WITH PHOTOGRAPH

1 NAME

HISTORIC Point No Point Light

AND/OR COMMON Point No Point Light

2 LOCATION

CITY, TOWN Dameron XX VICINITY OF COUNTY St. Marys STATE Maryland

3 PHOTO REFERENCE

PHOTO CREDIT USCoast Guard DATE OF PHOTO 1979

NEGATIVE FILED AT Fifth Coast Guard District, 431 Crawford St., Ports., VA 23705

4 IDENTIFICATION

DESCRIBE VIEW, DIRECTION, ETC IF DISTRICT, GIVE BUILDING NAME & STREET PHOTO NO
Aerial view 001

MAJOR BIBLIOGRAPHICAL REFERENCES

de Gast, Robert: The Lighthouses of the Chesapeake, The Johns Hopkins University Press, Baltimore Maryland, 1973.

10 GEOGRAPHICAL DATA

ACREAGE OF NOMINATED PROPERTY 5.1 (under water)

UTM REFERENCES

A	1,8	318,618,6,5	4,212,015,8,5	B			
	ZONE	EASTING	NORTHING		ZONE	EASTING	NORTHING
C				D			

VERBAL BOUNDARY DESCRIPTION

#2732

Boundary is 263.3 Feet extending outward from center in any direction.

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE	CODE	COUNTY	CODE
STATE	CODE	COUNTY	CODE

11 FORM PREPARED BY

NAME / TITLE

CW04 D. M. HANLEY, Special Projects Officer

ORGANIZATION

Commander, Fifth Coast Guard District

DATE

STREET & NUMBER

431 Crawford Street

TELEPHONE

(804) 398-6351

CITY OR TOWN

Portsmouth,

STATE

Virginia - 23705

12 CERTIFICATION OF NOMINATION

STATE HISTORIC PRESERVATION OFFICER RECOMMENDATION

YES

NO

NONE



STATE HISTORIC PRESERVATION OFFICER SIGNATURE

In compliance with Executive Order 11593, I hereby nominate this property to the National Register, certifying that the State Historic Preservation Officer has been allowed 90 days in which to present the nomination to the State Review Board and to evaluate its significance. The evaluated level of significance is National State Local.

FEDERAL REPRESENTATIVE SIGNATURE

TITLE

DATE

FOR NPS USE ONLY	
I HEREBY CERTIFY THAT THIS PROPERTY IS INCLUDED IN THE NATIONAL REGISTER	
	DATE
DIRECTOR, OFFICE OF ARCHEOLOGY AND HISTORIC PRESERVATION	DATE
ATTEST:	DATE
KEEPER OF THE NATIONAL REGISTER	

INVENTORY FORM FOR STATE HISTORIC SITES SURVEY

1 NAME

HISTORIC

POINT NO POINT LIGHT

AND/OR COMMON

2 LOCATION

STREET & NUMBER

CITY, TOWN

Dameron

___ VICINITY OF

CONGRESSIONAL DISTRICT

STATE

Maryland

COUNTY

St. Mary's

3 CLASSIFICATION

CATEGORY	OWNERSHIP	STATUS	PRESENT USE
<input type="checkbox"/> DISTRICT	<input type="checkbox"/> PUBLIC	<input type="checkbox"/> OCCUPIED	<input type="checkbox"/> AGRICULTURE <input type="checkbox"/> MUSEUM
<input type="checkbox"/> BUILDING(S)	<input type="checkbox"/> PRIVATE	<input type="checkbox"/> UNOCCUPIED	<input type="checkbox"/> COMMERCIAL <input type="checkbox"/> PARK
<input type="checkbox"/> STRUCTURE	<input type="checkbox"/> BOTH	<input type="checkbox"/> WORK IN PROGRESS	<input type="checkbox"/> EDUCATIONAL <input type="checkbox"/> PRIVATE RESIDENCE
<input type="checkbox"/> SITE	PUBLIC ACQUISITION	ACCESSIBLE	<input type="checkbox"/> ENTERTAINMENT <input type="checkbox"/> RELIGIOUS
<input type="checkbox"/> OBJECT	<input type="checkbox"/> IN PROCESS	<input type="checkbox"/> YES: RESTRICTED	<input type="checkbox"/> GOVERNMENT <input type="checkbox"/> SCIENTIFIC
	<input type="checkbox"/> BEING CONSIDERED	<input type="checkbox"/> YES: UNRESTRICTED	<input type="checkbox"/> INDUSTRIAL <input type="checkbox"/> TRANSPORTATION
		<input type="checkbox"/> NO	<input type="checkbox"/> MILITARY <input type="checkbox"/> OTHER:

4 OWNER OF PROPERTY

NAME

Telephone #:

STREET & NUMBER

CITY, TOWN

___ VICINITY OF

STATE, zip code

5 LOCATION OF LEGAL DESCRIPTION

COURTHOUSE,
REGISTRY OF DEEDS, ETC.

Liber #:

Folio #:

STREET & NUMBER

CITY, TOWN

STATE

6 REPRESENTATION IN EXISTING SURVEYS

TITLE

DATE

___ FEDERAL ___ STATE ___ COUNTY ___ LOCAL

DEPOSITORY FOR
SURVEY RECORDS

CITY, TOWN

STATE

7 DESCRIPTION

CONDITION

- EXCELLENT
- GOOD
- FAIR
- DETERIORATED
- RUINS
- UNEXPOSED

CHECK ONE

- UNALTERED
- ALTERED

CHECK ONE

- ORIGINAL SITE
- MOVED DATE _____

DESCRIBE THE PRESENT AND ORIGINAL (IF KNOWN) PHYSICAL APPEARANCE

CONTINUE ON SEPARATE SHEET IF NECESSARY

8 SIGNIFICANCE

PERIOD	AREAS OF SIGNIFICANCE -- CHECK AND JUSTIFY BELOW			
<input type="checkbox"/> PREHISTORIC	<input type="checkbox"/> ARCHEOLOGY-PREHISTORIC	<input type="checkbox"/> COMMUNITY PLANNING	<input type="checkbox"/> LANDSCAPE ARCHITECTURE	<input type="checkbox"/> RELIGION
<input type="checkbox"/> 1400-1499	<input type="checkbox"/> ARCHEOLOGY-HISTORIC	<input type="checkbox"/> CONSERVATION	<input type="checkbox"/> LAW	<input type="checkbox"/> SCIENCE
<input type="checkbox"/> 1500-1599	<input type="checkbox"/> AGRICULTURE	<input type="checkbox"/> ECONOMICS	<input type="checkbox"/> LITERATURE	<input type="checkbox"/> SCULPTURE
<input type="checkbox"/> 1600-1699	<input type="checkbox"/> ARCHITECTURE	<input type="checkbox"/> EDUCATION	<input type="checkbox"/> MILITARY	<input type="checkbox"/> SOCIAL/HUMANITARIAN
<input type="checkbox"/> 1700-1799	<input type="checkbox"/> ART	<input type="checkbox"/> ENGINEERING	<input type="checkbox"/> MUSIC	<input type="checkbox"/> THEATER
<input type="checkbox"/> 1800-1899	<input type="checkbox"/> COMMERCE	<input type="checkbox"/> EXPLORATION/SETTLEMENT	<input type="checkbox"/> PHILOSOPHY	<input type="checkbox"/> TRANSPORTATION
<input checked="" type="checkbox"/> 1900-	<input type="checkbox"/> COMMUNICATIONS	<input type="checkbox"/> INDUSTRY	<input type="checkbox"/> POLITICS/GOVERNMENT	<input type="checkbox"/> OTHER (SPECIFY)
		<input type="checkbox"/> INVENTION		

SPECIFIC DATES 1905

BUILDER/ARCHITECT

STATEMENT OF SIGNIFICANCE

CONTINUE ON SEPARATE SHEET IF NECESSARY

9 MAJOR BIBLIOGRAPHICAL REFERENCES

CONTINUE ON SEPARATE SHEET IF NECESSARY

10 GEOGRAPHICAL DATA

ACREAGE OF NOMINATED PROPERTY _____

VERBAL BOUNDARY DESCRIPTION

LIST ALL STATES AND COUNTIES FOR PROPERTIES OVERLAPPING STATE OR COUNTY BOUNDARIES

STATE COUNTY

STATE COUNTY

11 FORM PREPARED BY

NAME / TITLE

ORGANIZATION

DATE

STREET & NUMBER

TELEPHONE

CITY OR TOWN

STATE

The Maryland Historic Sites Inventory was officially created by an Act of the Maryland Legislature, to be found in the Annotated Code of Maryland, Article 41, Section 181 KA, 1974 Supplement.

The Survey and Inventory are being prepared for information and record purposes only and do not constitute any infringement of individual property rights.

RETURN TO: Maryland Historical Trust
The Shaw House, 21 State Circle
Annapolis, Maryland 21401
(301) 267-1438

SM-272
Point No Point Light
Point No Point Quadrangle

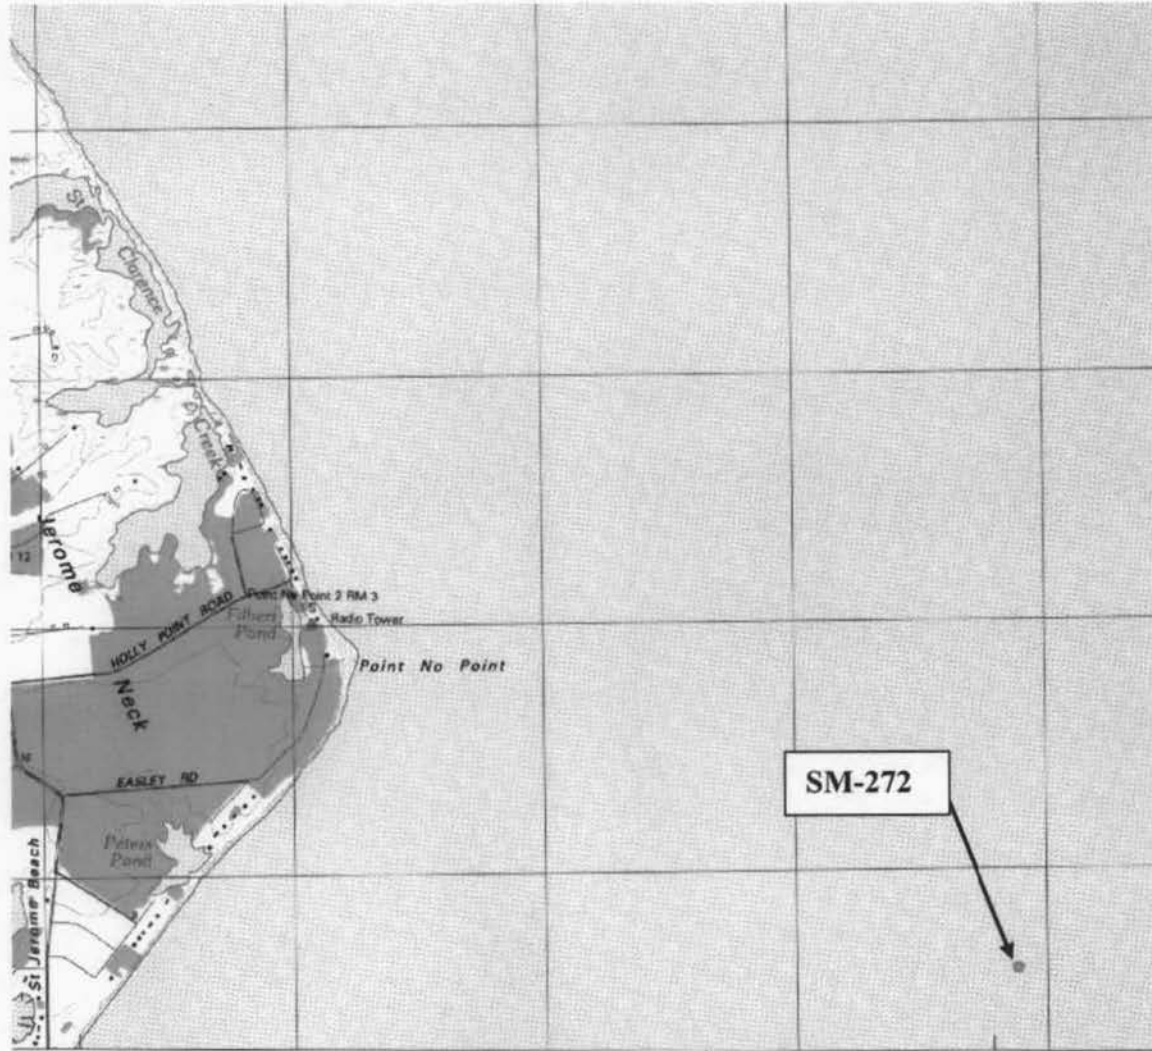


Photo by Marie Vincent & Jerry Waters



